





White Rose


Strong Block, Safe Passage

White Rose took its place among the world actors in the automation sector with the products it developed constantly and the projects it realized.

In the globalized economy doing only your work is no longer Sufficient. In the globalized world you have to be an expert in your sector. You must both do your work perfectly and also gain your sector brand new innovative products. You must organize partners who will be happy to work with you and become solution partners. This can only be organized in institutions with workers kneaded with science-technology culture that invest money in research and development. With this important target, we are giving direction to the future of automation also by producing solutions to the requirements of this date with our efforts. Therefore, White Rose is holding the title of shining star of the sector in its hands with an experience of 25 years.

To good days together.....

INDEX

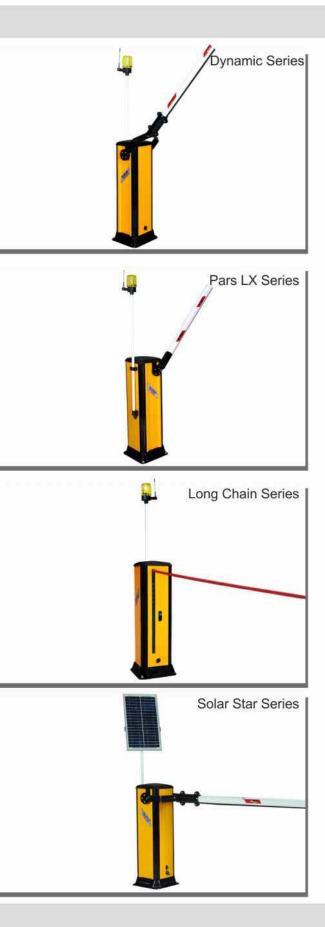



Quality

Our products manufactured in the world standards, along with maintaining its existing quality is continuously developing it with the efforts of our Research and Development team. It possesses ISO 9001-2008, TÜV CERT, TSE-HYB, and CE certificates as Quality Certificates.



Dynamic Barrier

Dynamic Barrier

You can depend on it

Our products are presented to the market after passing through required quality control and tests. Their quality and operation performance have been certified through tests by institution accredited by TSE.



You keep the control

Dynamic Barrier brings together the brand new structure, practical control system, functionality, dependability and many more advantages. By preventing misuse incidents, provides effective control of the parking lots. Furthermore, there is a led system under the arm which lights green when the barrier is open, and which lights red when the barrier is closed and which goes into the circuit automatically when the weather becomes dark.











Dynamic Barrier, Technical Information

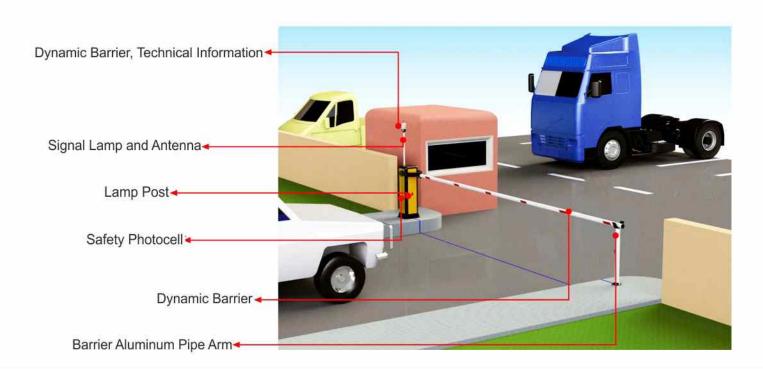

Series	35R DC	4 DC	6 DC	4 AC	6 AC
Power Source	230V AC 50-60Hz				
Motor Voltage	24V DC		230V AC		
Maximum Torque / Nm	95	28	6	60	00
Average Current / A	2		1,5		
Opening Period / s	1,5	4	5		i
Medium Temp. / °C	-20 +70				
Operation Durability / %		100		50)
Protection Class / IP	54				



Global Service Network

Our firm providing uninterrupted service before and after sales will asist the clients on the subject of proposals and sales of the products suitable for the locations with his client representative department. Our team who are together with the clients during installation and service phases with the technical service department, have adopted the new service concept and client focused principles. With our expert staff who are experienced in their branches and dealer network dispersed throughout Turkey, we are very close to you regardless of where you are. We are a company developing automation systems and producing all of the software and automation equipment and at the same time providing maintenance service of the products with our wide dealer network and we are constantly following and developing the technology.

The application of our dealers who are active in various regions of Turkey who wished to become authorized service have been evaluated and the best and most qualitative of these services have been included in our formed service network for

providing better service to our clients.





Pars LX Barrier





Rotproof noncorrosive

Esthetic appearance has been provided with rounded external lines and has been protected against rust and corrosion with complete aluminum body. All types of has been synchronized with the control system with micro processor control panel.



Aerodynamic round arm


Aerodynamic aluminum round arm has been used against wind resistance. Arm weight in manual use with balanced spring system is 100 gr. After the vehicle passes, closes time adjusted with automatic closing system. In addition, clearer vision of the arm in the night has been provided by a led system under the arm which operates during only the night and lights red when it is closed and green when it is open and thus possible collision risks have been eliminated.








Pars LX Barrier, Technical Information

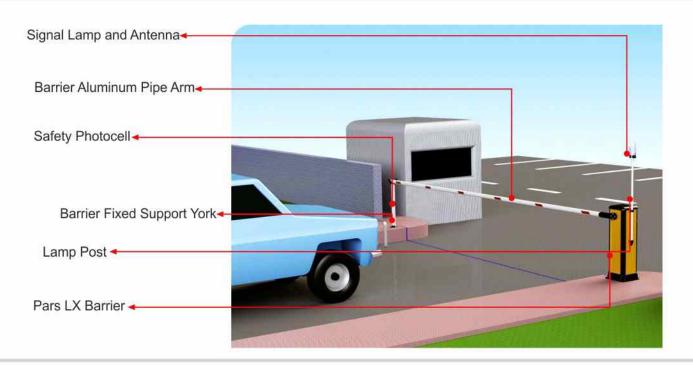



Series	35R DC	4 DC	4 AC	6 AC
Power Source	230V AC 50-60Hz			
Motor Voltage	24V DC		230V AC	
Maximum Torque / Nm	95	286	[9	600
Average Current / A	2		1,5	
Opening Period / s	1,5	4,5	5	
Medium Temp. / °C	-20 +70			
Operation Durability / %	100		50	
Protection Class / IP	54			

Provides practical use

Pars LX Barrier is the economic model of White Rose. It provides practical use for places like sites, apartments and business centers with its fast opening and closing feature. By means of safety it does not close when there is an object under the arm and by means of current control it perceives a possible jam and moves in the opposite direction. Furthermore, it possesses the feature of slow start and slow stop function for the productivity of the motor and reducer. The operation durability of the motor is 100% and operates safely even in the most intense locations.





Long Chain Barriers

Automatic closing feature closes the road automatically after the vehicle has passed. The components of the barrier closing the road is manufactured from steel rope covered with galvanize and dressed with rubber plastic pipe on top. Strength resistance is high.

Long Chain Barriers

Long Chain Barriers

Fast, safe, economic

Long Chain Barriers with remote control provides you to control more area easier and more economically. Long Chain Barriers are fast, safe and economic.



Single barrier to 25 meters

Operates with the logic of spreading the rope and laying it on the ground. Can easily close a 25 meter area that is difficult to be closed by other passage systems. It is preferred in areas where many vehicles park with its feature of lifting and lowering the rope in a very short period.













REMOTE CONTROL

Chain barriers with remote control controls more area more economically.

Long Chain Barriers, Technical Information

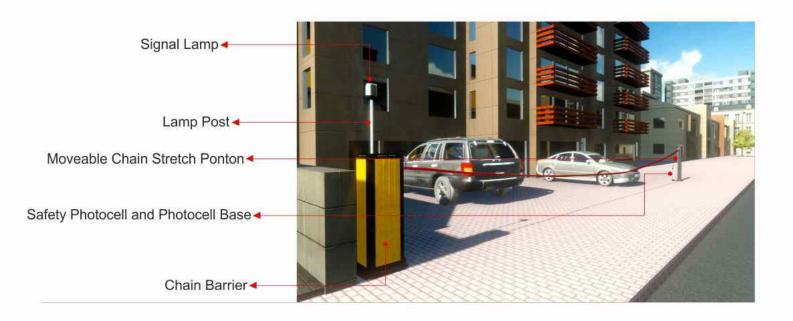

Power Source	230V AC 50-60Hz		
Motor Voltage	24V DC		
Maximum Torque / Nm	286		
Average Current / A	2		
Opening Period / s	17		
Medium Temperature / °C	-20 +70		
Operation Durability / %	100		
Protection Class / IP	54		



Wanted Product for sequential parking lots

Along with being a wanted product for sequential parking lots the long chain barriers come into forefront among similar with the economic solutions they provide. The barrier net passing area when opened with its specially designed system. Long Chain Barriers which are indispensables of the sequential type parking lot systems are the most economical solution for garage entries whose closure with other systems are very difficult and expensive. The system is under warranty for 2 years.





Solar Star Barrier with Solar Energy, Technical Information

Series	4 DC	6 DC	
Power Source	Solar Energy		
Motor Voltage	12V DC		
Maximum Torque / Nm	143		
Average Current / A	1		
Opening Period / s		6	
Medium Temperature / °C	-20 +70		
Operation Durability / %	100		
Safety Class / IP	54		


































Barrier Accessories

You Also Join the White Rose Family





You also join this family

White Rose which is one of the firms who have a say in the world of automation sector is sharing its 25 years of experience and expertise through its active dealers in the region across the world. Let us proceed to the future on the road enlightened by our past. You also join the White Rose family.

Please reach us to cooperate with White Rose who has different dealership models in line with requirements and and potential of the market. From over the world www.whiterose.com.tr and from all over Turkey (+90) 444 26 14.

www.whiterose.com.tr



